


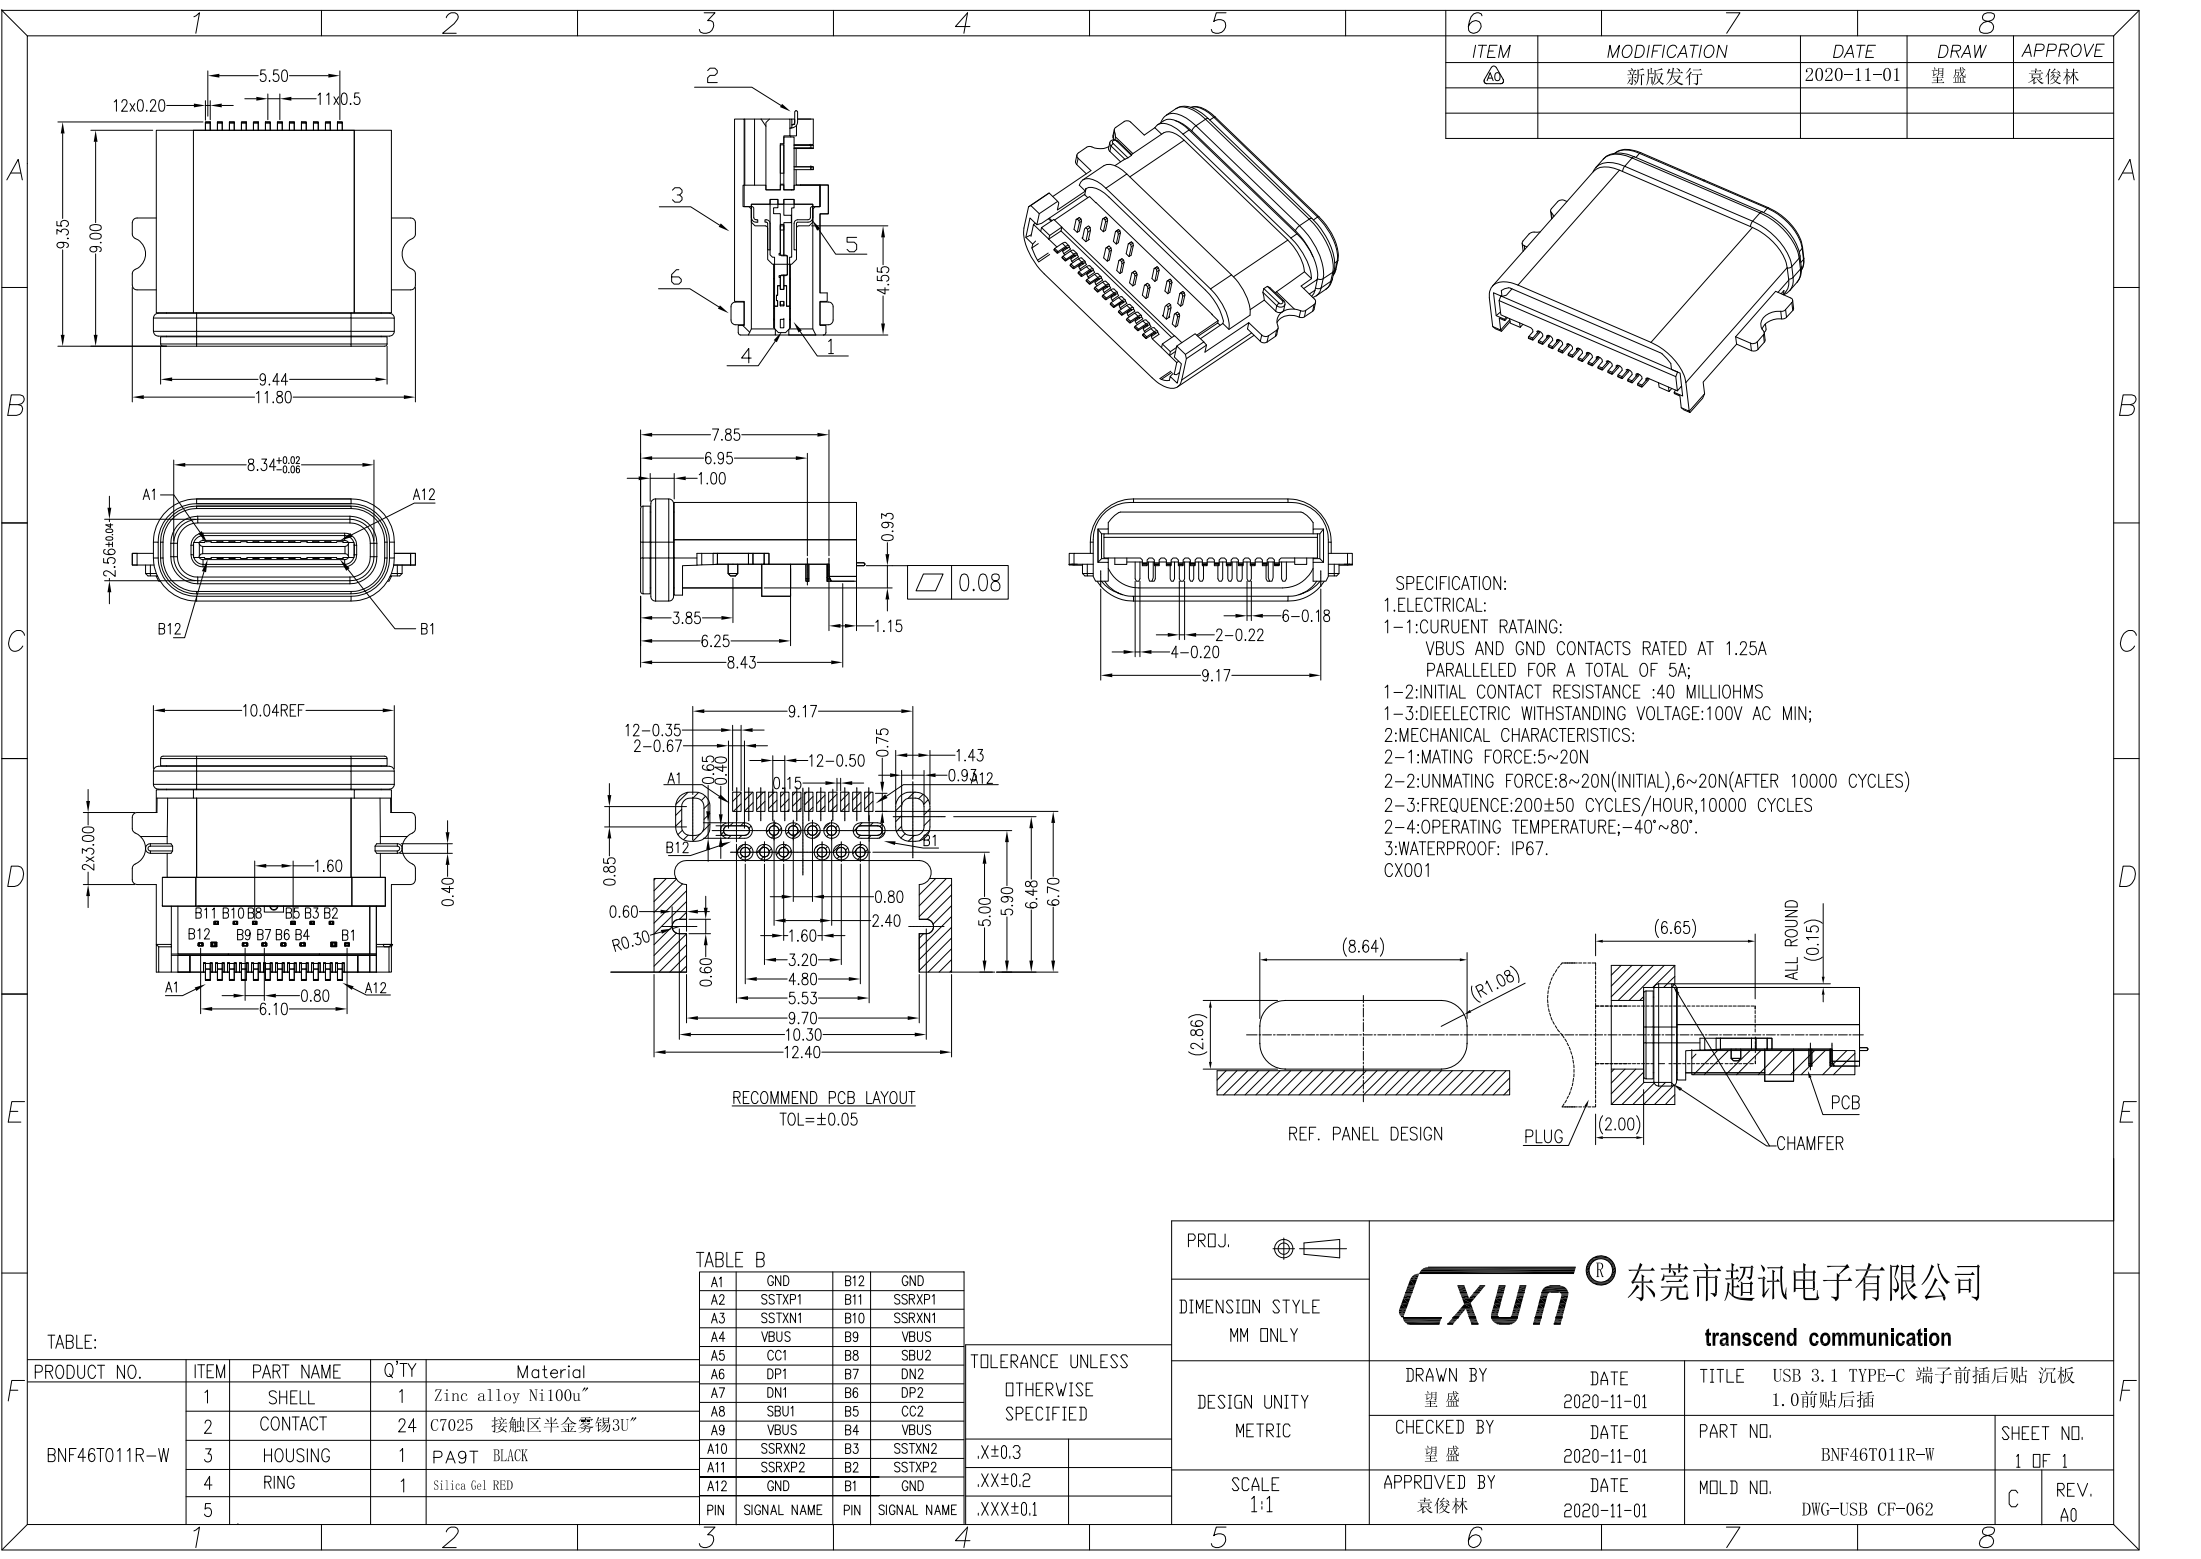

6	7	8
ITEM	MODIFICATION	DATE
△	新版发行	2020-11-01

DRAW	APPROVE
望盛	袁俊林

SPECIFICATION:

1.ELECTRICAL:

1-1:CURRENT RATING:
VBUS AND GND CONTACTS RATED AT 1.25A
PARALLELED FOR A TOTAL OF 5A;

1-2:INITIAL CONTACT RESISTANCE :40 MILLIOHMS

1-3:DIELECTRIC WITHSTANDING VOLTAGE:100V AC MIN;

2:MECHANICAL CHARACTERISTICS:

2-1:MATING FORCE:5~20N

2-2:UNMATING FORCE:8~20N(INITIAL),6~20N(AFTER 10000 CYCLES)

2-3:FREQUENCY:200±50 CYCLES/HOUR,10000 CYCLES

2-4:OPERATING TEMPERATURE; -40°~80°.

3:WATERPROOF: IP67.

CX001

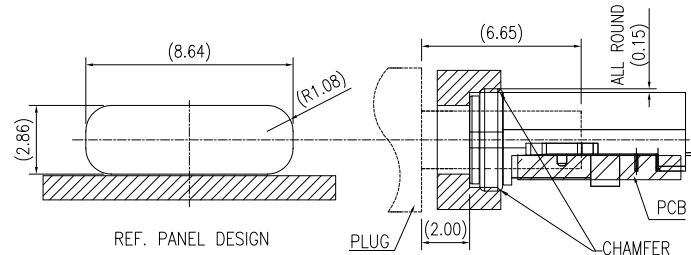


TABLE B

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBUS2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

TOLERANCE UNLESS OTHERWISE SPECIFIED
.X±0.3
.XX±0.2
.XXX±0.1

PROJ.	 东莞市超讯电子有限公司			
DIMENSION STYLE MM ONLY	transcend communication			
DESIGN UNITY METRIC	DRAWN BY 望盛	DATE 2020-11-01	TITLE USB 3.1 TYPE-C 端子前插后贴 沉板 1.0前贴后插	
SCALE 1:1	CHECKED BY 望盛	DATE 2020-11-01	PART NO. BNF46T011R-W	SHEET NO. 1 OF 1
	APPROVED BY 袁俊林	DATE 2020-11-01	MOLD NO. DWG-USB CF-062	REV. A0

TABLE:

PRODUCT NO.	ITEM	PART NAME	Q'TY	Material
BNF46T011R-W	1	SHELL	1	Zinc alloy Ni100u"
	2	CONTACT	24	C7025 接触区半金旁锡3U"
	3	HOUSING	1	PA9T BLACK
	4	RING	1	Silica Gel RED
	5			