



6	7	8
ITEM	MODIFICATION	DATE
△0	新版发行	2020/10/19
DRAW	APPROVE	

防水圈

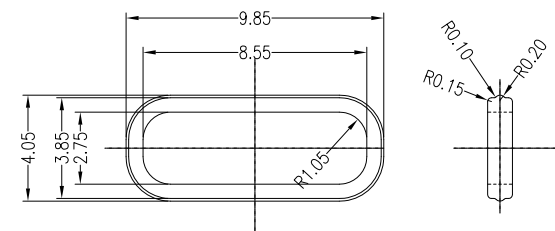

Cap dimensions

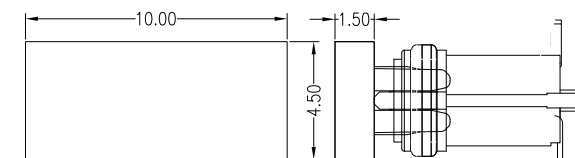

Note:

1.Material:

- 1.1 Housing: LCP
- 1.2 Contact:C5191,t=0.20mm
- 1.3 Shell: Zinc Alloy

2.ELECTRICAL:

2-1:CURUENT RATAING:

VBUS AND GND CONTACTS RATED AT 1.5A
PARALLELED FOR A TOTAL OF 3A;

2-2:INITIAL CONTACT RESISTANCE :40 mΩ

2-3:DIELECTRIC WITHSTANDING VOLTAGE:
100V AC MIN;

3:MECHANICAL CHARACTERISTICS:

3-1:MATING FORCE:5~20N






3-2:UNMATING FORCE:8~20N(INITIAL),
6~20N(AFTER 10000 CYCLES)

3-3:FREQUENCE: 200±50 CYCLES /HOUR,10000 CYCLES

3-4:OPERATING TEMPERATURE ;-40°~80°.

4:WATERPROOF:IP-X7.

CX004

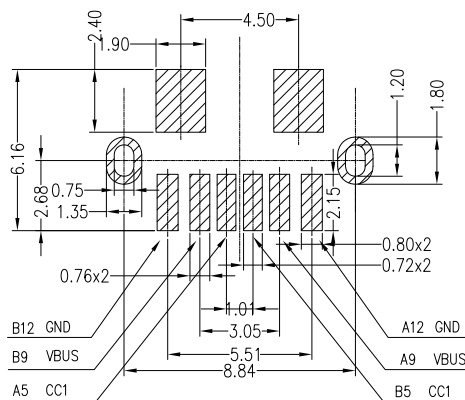

PCB LAYOUT 图仅供参考

TABLE:

PRODUCT NO.	ITEM	PART NAME	Q'TY	Material
BNF01S2204R-W	1	SHELL	1	Zinc Alloy Ni80u"
	2	CONTACT	6	C5191 半金雾锡30"
	3	HOUSING	1	LCP BLACK
	4	CAP	1	LCP BLACK
	5	RING	1	Silica Gel RED

TOLERANCE UNLESS
OTHERWISE
SPECIFIED

.X±0.30

.XX±0.20

.XXX±0.10

PROJ.

DIMENSION STYLE
MM ONLY

MAJOR

SCALE

1:1

CXUN[®]

东莞市超讯电子有限公司

transcend communication

DRAWN BY

袁春梅

DATE

2020/10/19

TITLE

USB TYPE-C 6P 立贴带贴片脚防水母座

CHECKED BY

望盛

DATE

2020/10/19

PART NO.

SEE TABLE

SHEET NO.

1 OF 1

APPROVED BY

袁俊林

DATE

2020/10/19

MOLD NO.

DWG-USB CF-065

C

REV.

A0